


# CG-3500 MODEL

## EXTRUDED ALUMINUM BACKDRAFT DAMPER

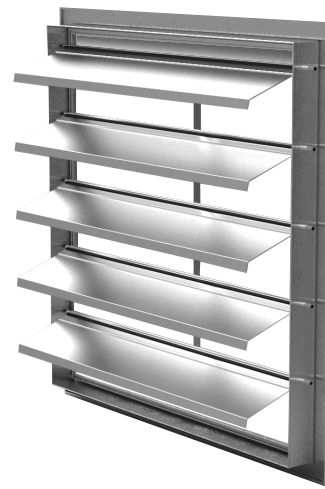

- Operating velocity: 2501-3500 ft/min.
- Designed to prevent reverse air flow of the low pressure and low speed ventilation system
- Barometric gravity damper are built to mount vertically to handle horizontal airflow
- **Specify operation velocity when ordering**

**CONSTRUCTION:** Frames and blades made of aluminum .


**FINISH:** Anodized frame and mill finish blades .

**PERFORMANCE:** Designed to operate with a maximum pressure, with differential pressure of 1 "of water column\* (250N / mt.2) and a maximum velocity **3500 Feet / Min.**

**ACCESORIES:** Optionally they can be supplied with mosquito net or aviary mesh, as additional protection, which prevents the entry of insects and / or birds

## Dimensional Data

Min. Size	Max. Size Single Blade	Max. Size Selected Blade
6" X 6"	18" X 72"	96" X 96"

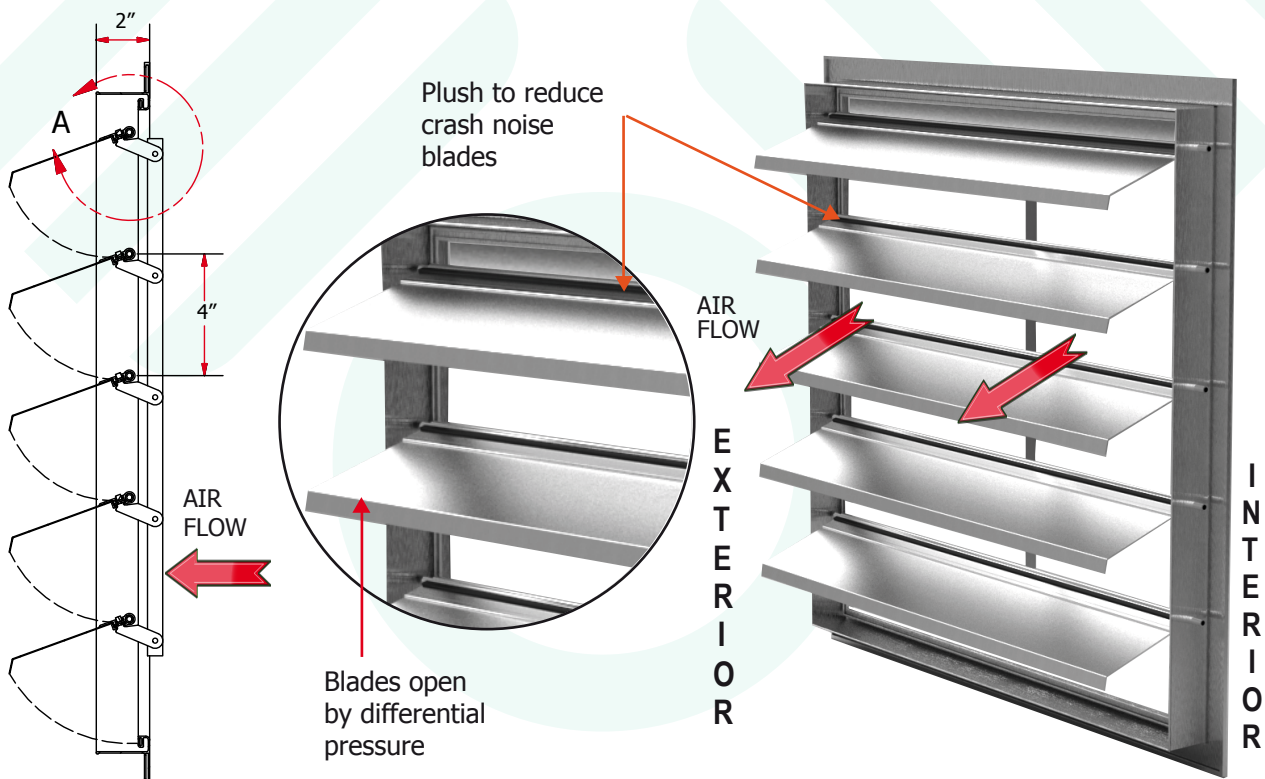

Frame "L" installed on the wall by the Interior (CGSI) or installed on the wall from the outside(CGSE)

