HLPC MODEL

ALUMINUM LOUVER DOOR
60% FREE AREA IN 1 FRAME

- For an optimal ventilation in parking lots, machine rooms, service areas, towers, industrial buildings, etc
- 60% free area.
- High reduction to the rain passage
- Non internal visibility.
- Installation with solid structural frame and bell louver profiles

CONSTRUCTION:
Extruded aluminum.

FINISH:
Anodized finish standard.
Standard white Anodic acrylic paint. Other colors available.

Dimensional Data

*Not scaled

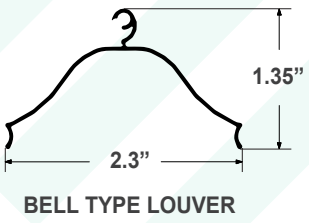
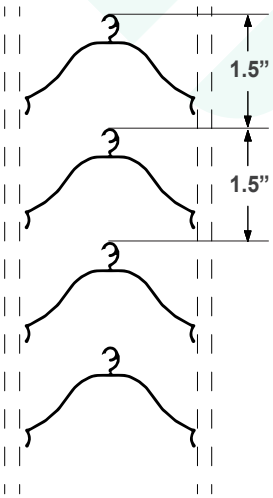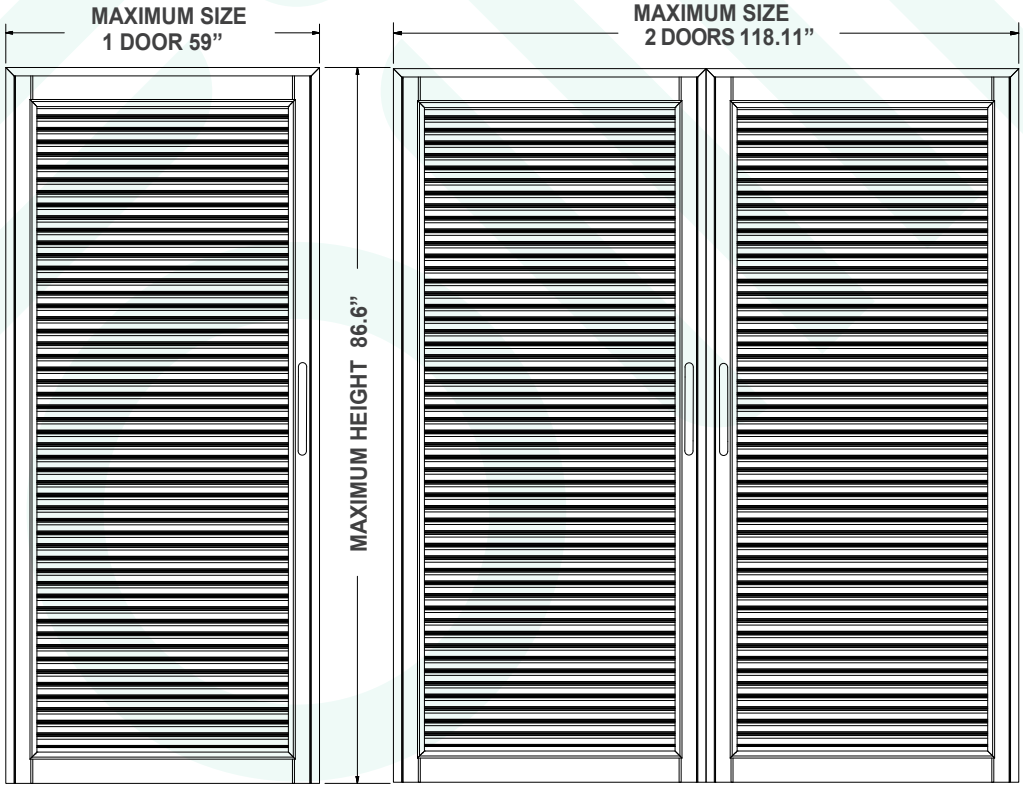
BELL TYPE LOUVER